

S SERIES 系列

Outdoor modern fixed LED panel 新型户外固装显示屏



S SERIES


- Front & rear access, easy to install and access
- Full-enclosed IM design, anti-moisture and dust & water proof
- Self-cooling module design
- Curve optional
- Anti-UV module ensures longer life-span
- High gray scale, wide viewing angle
- High contrast ratio, bringing out vivid and natural image
- 前后维护，便于安装和维护
- 全封闭模组，防潮，防尘，防水
- 散热性好
- 箱体弧度可选
- 模组带抗UV，保证屏幕寿命长
- 高灰度，广视角
- 高对比度，带来栩栩如生的画面



- 前维护
Front Access
- 高亮
High Brightness
- 防护等级IP65
IP65
- 宽视角
Wide Viewing Angle
- 固装
Fixed
- 高效节能
Energy-saving

CE ETL RoHS EMC


FEATURES 特性

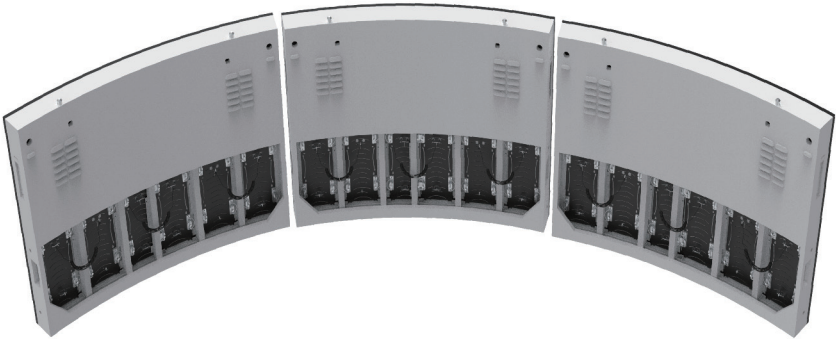

Curve customized 弧度可定制




Customized width optional 宽度可定制

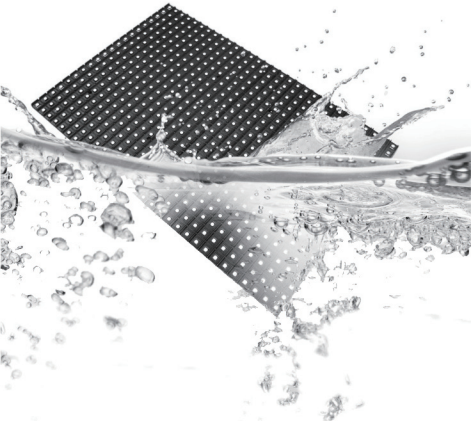

IP67 full-closed module IP67全封闭模组



Conventional installation 常规安装

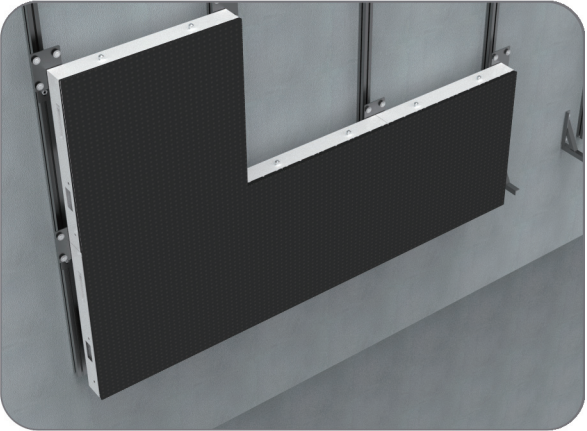

Wall-mounted installation 贴墙安装

SPECIFICATIONS 详细参数

参数	Parameter	Unit	S4	S6	S8	S10	S10-T	S15-T
像素间距	Pixel pitch	mm	4.76	6.25	8.33	10	10.88	15.24
亮度	Brightness	nits	5500	6000	7000	7000	8000	8000
像素组成	Pixel configuration	R/G/B	SMD 3 in 1				DIP346	
色温	Colour temperature	deg.K	6500					
水平视角	Viewing angle-Horizontal(50% brightness)	deg.	140 (+70/-70)	140 (+70/-70)	140 (+70/-70)	140 (+70/-70)	120 (+60/-60)	120 (+60/-60)
垂直视角	Viewing angle-Vertical(50% brightness)	deg.	75 (+25/-50)	75 (+20/-55)	90 (+30/-60)	95 (+35/-60)	70 (+25/-45)	80 (+30/-50)
推荐最小观看距离	Recommended minimum viewing distance	m	4	6	8	10	10	15
箱体宽度	Panel width	mm	1000				1219.2	
箱体高度	Panel height	mm	800				914.4	
箱体厚度	Panel depth	mm	122				133	
箱体面积	Panel area	m²	0.8				1.11	
箱体材料	Panel material		Steel/Aluminum (铁/铝)					
箱体重量	Panel weight	Kg	42/36				50/42	
防护等级 (前/后)	Ingress protection (front/rear)	IP	65/43					
箱体像素矩阵	Pixel matrix per panel		210x168	160x128	120x96	100x80	112x84	80x60
亮度控制	Brightness control		255					
数字处理	Digital processing	bit	16					
视屏帧频	Frame rate	Hertz	50/60					
视频刷新	Display refresh rate	Hertz	1920					
输入电压	Input voltage(nomina)	VAC	100 ~ 240					
输入电源频率	Input power frequency	Hertz	50 ~ 60					
输入最大功耗	Input power(max)	W/m²	700	710	740	760	400	450
输入额定功耗	Input power(avg)	W/m²	245	238	238	245	190	160
工作环境	Operating temperature range	Deg.C	- 10~+ 40					
显示屏使用寿命	Lifetime(50% brightness)	Hour	100,000					